
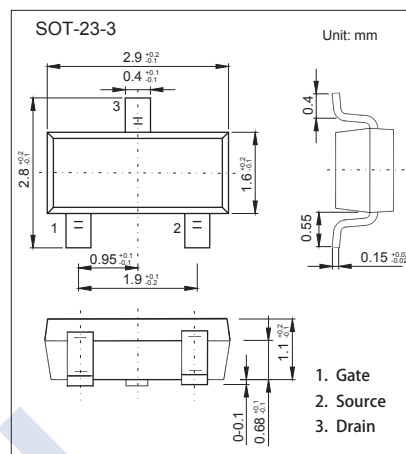


N-Channel MOSFET

BSS138 (KSS138)

■ Features

- V_{DS} (V) = 50V
- I_D = 300 mA (V_{GS} = 10V)
- $R_{DS(ON)} < 2.5 \Omega$ (V_{GS} = 10V)
- $R_{DS(ON)} < 3.5 \Omega$ (V_{GS} = 4.5V)
- Low On-Resistance
- ESD Rating: 1.5KV HBM

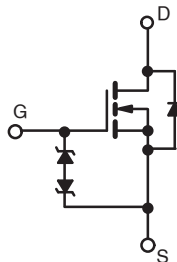

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	50	V
Drain-Gate Voltage $R_{GS} \leq 20K\Omega$	V_{DG}	50	
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current	I_D	300	mA
Power Dissipation	P_D	300	mW
Thermal Resistance Junction- to-Ambient	R_{thJA}	417	$^\circ\text{C}/\text{W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to 150	

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V_{DSS}	$I_D=250 \mu\text{A}$, $V_{GS}=0\text{V}$	50			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=50\text{V}$, $V_{GS}=0\text{V}$			0.5	μA
Gate-Body Leakage Current	I_{GSS}	$V_{DS}=0\text{V}$, $V_{GS}=\pm 20\text{V}$			± 1	μA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$, $I_D=250 \mu\text{A}$	0.5		1.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10\text{V}$, $I_D=220\text{mA}$			2.5	Ω
		$V_{GS}=4.5\text{V}$, $I_D=220\text{mA}$			3.5	
Forward Transconductance	g_{FS}	$V_{DS}=25\text{V}$, $I_D=0.3\text{A}$, $f=1\text{KHz}$	100			mS
Input Capacitance	C_{iss}	$V_{GS}=0\text{V}$, $V_{DS}=10\text{V}$, $f=1\text{MHz}$			50	pF
Output Capacitance	C_{oss}				25	
Reverse Transfer Capacitance	C_{rss}				8	
Turn-On DelayTime	$t_{d(on)}$	$V_{DS}=30\text{V}$, $I_D=0.3\text{A}$, $R_G=50 \Omega$			20	ns
Turn-Off DelayTime	$t_{d(off)}$				20	







■ Marking

Marking	J1
---------	----

N-Channel MOSFET

BSS138 (KSS138)

■ Typical Characteristics

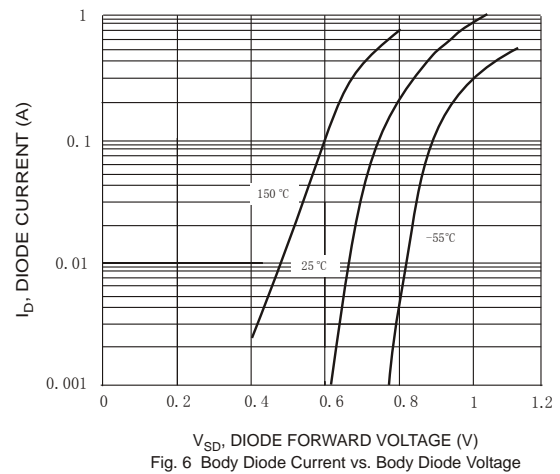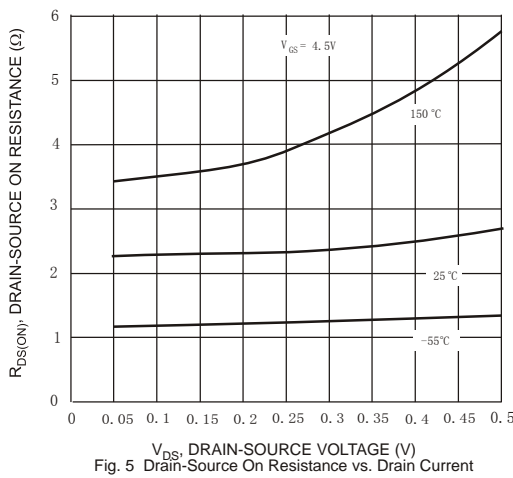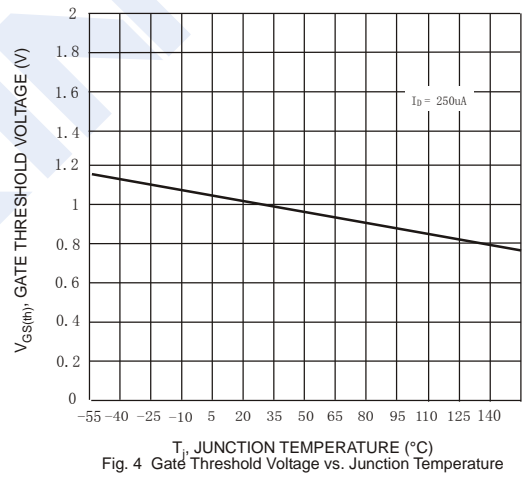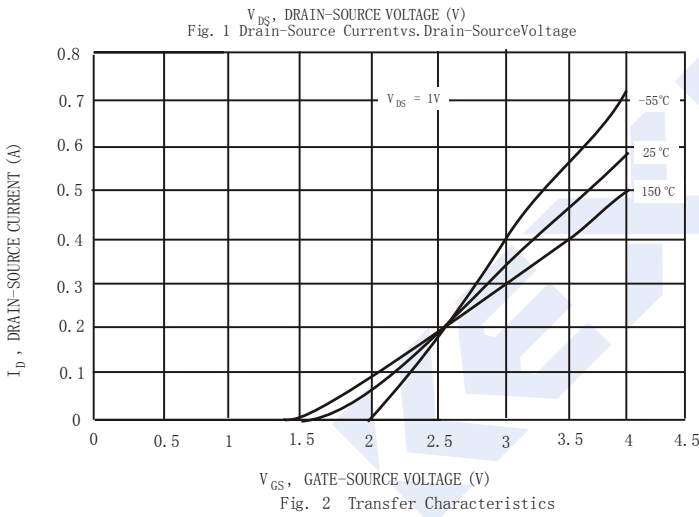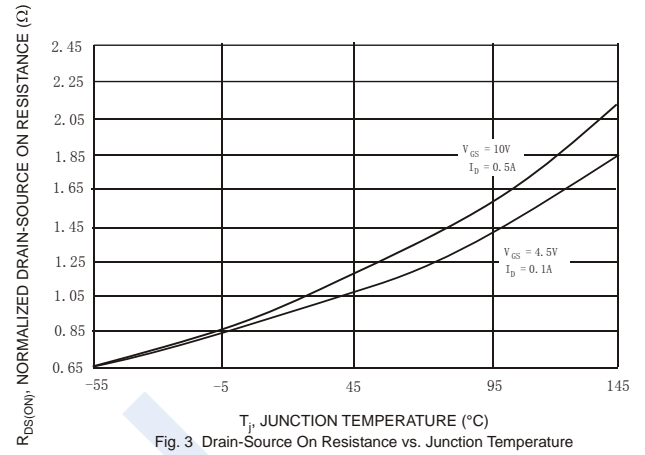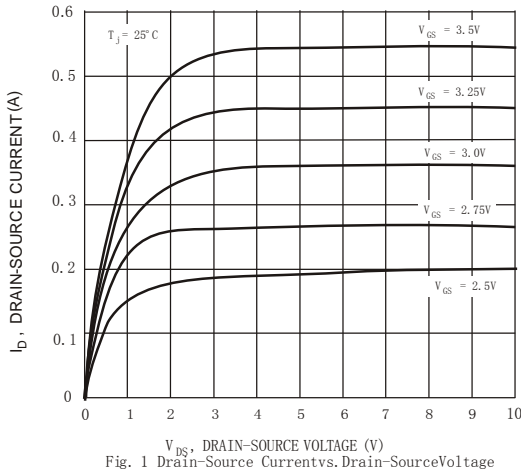

N-Channel MOSFET

BSS138 (KSS138)

■ Typical Characteristics

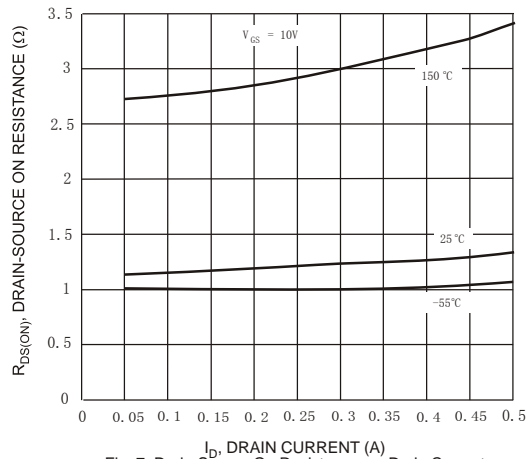


Fig. 7 Drain-Source On Resistance vs. Drain Current

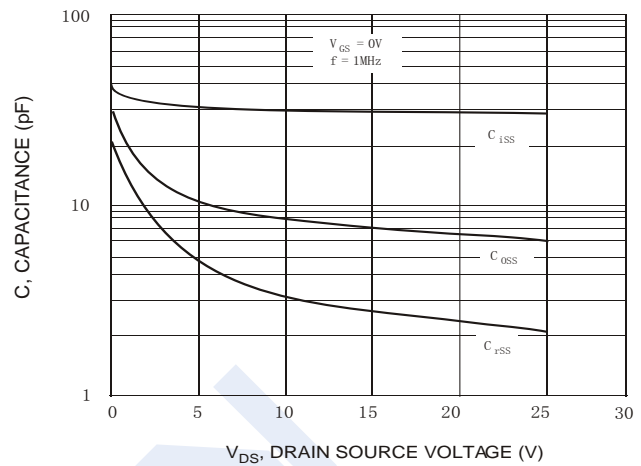


Fig. 8 Capacitance vs. Drain Source Voltage