
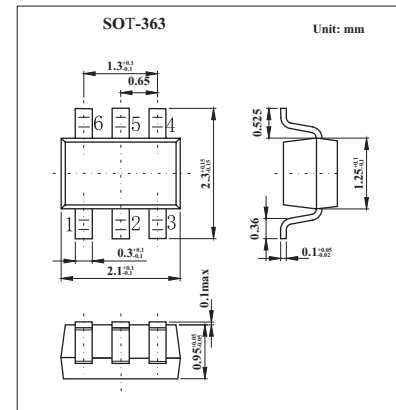


## Quad Surface Mount Switching Diode Array KAW56DW(BAW56DW)

### ■ Features

- Fast Switching Speed
- Ultra-Small Surface Mount Package
- For General Purpose Switching Applications
- High Conductance



### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

| Parameter   | Symbol          | Rating      | Unit             |
|---|-----------------|-------------|------------------|
| Non-Repetitive Peak Reverse Voltage                               | $V_{RM}$        | 100         | V                |
| Peak Repetitive Reverse Voltage                                   | $V_{RRM}$       |             |                  |
| Working Peak Reverse Voltage                                      | $V_{RWM}$       | 75          | V                |
| DC Blocking Voltage   | $V_R$           |             |                  |
| RMS Reverse Voltage   | $V_{R(RMS)}$    | 53          | V                |
| Average Rectified Output Current                                  | $I_o$           | 150         | mA               |
| Forward Continuous Current  | $I_{FM}$        | 300         | mA               |
| Non-Repetitive Peak Forward Surge Current @ $t = 1.0 \mu\text{s}$ | $I_{FSM}$       | 2.0         | A                |
| @ $t = 1.0\text{s}$   |                 | 1.0         |                  |
| Power Dissipation   | $P_d$           | 200         | mW               |
| Thermal Resistance Junction to Ambient Air                        | $R_{\theta JA}$ | 625         | K/W              |
| Operating and Storage Temperature Range                           | $T, T_{STG}$    | -65 to +150 | $^\circ\text{C}$ |

### ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

| Parameter                    | Symbol   | Testconditions   | Min | Typ | Max   | Unit          |
|------------------------------|----------|--|-----|-----|-------|---------------|
| Maximum Forward Voltage      | $V_{FM}$ | $I_F = 1.0\text{mA}$   |     |     | 0.715 | V             |
|                              |          | $I_F = 10\text{mA}$  |     |     | 0.855 |               |
|                              |          | $I_F = 50\text{mA}$  |     |     | 1.0   |               |
|                              |          | $I_F = 150\text{mA}$   |     |     | 1.25  |               |
| Maximum Peak Reverse Current | $I_{RM}$ | $V_R = 75\text{V}$   |     |     | 2.5   | $\mu\text{A}$ |
|                              |          | $V_R = 75\text{V}, T_j = 150^\circ\text{C}$                          |     |     | 50    | $\mu\text{A}$ |
|                              |          | $V_R = 25\text{V}, T_j = 150^\circ\text{C}$                          |     |     | 30    | $\mu\text{A}$ |
|                              |          | $V_R = 20\text{V}$   |     |     | 25    | nA            |
| Junction Capacitance         | $C_j$    | $V_R = 0, f = 1.0\text{MHz}$   |     |     | 2     | pF            |
| Reverse Recovery Time        | $t_{rr}$ | $I_F = I_R = 10\text{mA}, I_{rr} = 0.1 \times I_R, R_L = 100 \Omega$ |     |     | 4     | ns            |

### ■ Marking

|         |     |
|---------|-----|
| Marking | KJC |
|---------|-----|